

KKL...H30 90° Horizontal Bend

Overview:

Application

Diversions in cable routing.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

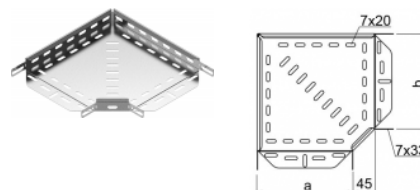

For installation use Screw Sets SGK M6×10 or SG M6×10.

In case of special orders please specify dimensions a and b.

Versions:

Sheet thickness: **0,7 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKL50H30	50	131305	20	0,10
KKL100H30	100	131310	20	0,18
KKL150H30	150	131315	10	0,29
KKL200H30	200	131320	10	0,42
KKL300H30	300	131330	10	0,82

Connected products:



KGL...H30 Cable Tray KGR...H30 Cable Tray KKL...H30 Cable Tray KBJ...H30 Cable Tray KBR...H30 Cable Tray KBL...H30 Cable Tray