

## LDP...H50N 90° Horizontal Bend

### Overview:

**Application**

Diversion in cable routing

**Material**

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)


**Available to order:**

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

**NOTE: The type of fitting rung corresponds to the type of cable ladder in the same order Cable Ladder DK - rung cross-section Cable Ladder DU - rung cross-section**

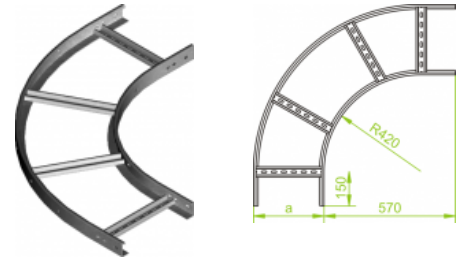

### Versions:

Sheet thickness: 1,5 mm

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LDP100H50N	100	456810	2	2,67
LDP200H50N	200	456820	2	3,22
LDP300H50N	300	456830	2	3,76
LDP400H50N	400	456840	2	4,31
LDP500H50N	500	456850	2	4,86
LDP600H50N	600	456860	2	5,41