

LDC...H50N 90° Horizontal Bend

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)


Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

NOTE: The type of fitting rung corresponds to the type of cable ladder in the same order Cable Ladder DK - rung cross-section Cable Ladder DU - rung cross-section

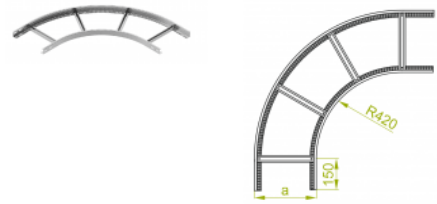

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LDC100H50N	100	456910	2	3,56
LDC200H50N	200	456920	2	4,29
LDC300H50N	300	456930	2	5,02
LDC400H50N	400	456940	2	5,75
LDC500H50N	500	456950	2	6,49
LDC600H50N	600	456960	2	7,22