

## LDZC...H50N 90° Horizontal Bend - External

### Overview:

**Application**

Diversion in cable routing

**Material**

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)


**Available to order:**

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

**NOTE: The type of fitting rung corresponds to the type of cable ladder in the same order Cable Ladder DK - rung cross-section Cable Ladder DU - rung cross-section**

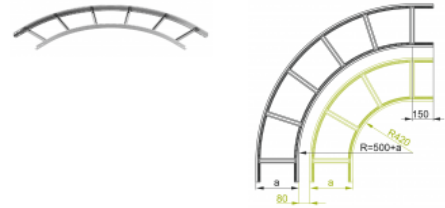

### Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LDZC100H50N	100	457110	2	4,09
LDZC200H50N	200	457120	2	5,46
LDZC300H50N	300	457130	2	6,86
LDZC400H50N	400	457140	2	8,25
LDZC500H50N	500	457150	2	9,54
LDZC600H50N	600	457160	2	11,50