

## LPDC...H50N Adjustable Vertical Bend

### Overview:

**Application**

Diversion in cable routing

**Material**


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

**L-** powder coating in a full range of colours (PC)

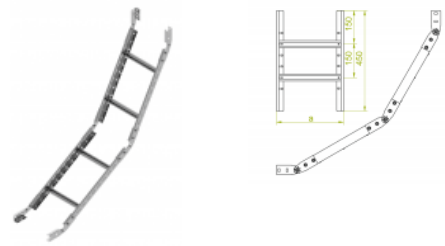

### Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LPDC100H50N	100	457710	2	4,84
LPDC200H50N	200	457720	2	5,34
LPDC300H50N	300	457730	2	5,88
LPDC400H50N	400	457740	2	6,63
LPDC500H50N	500	457750	2	6,88
LPDC600H50N	600	457760	2	7,40