

RDPC...H50N Right Reducer

Overview:

Application

Reducing/extending widths of cable runs

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)


Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

In case of special orders specify dimensions a, b
NOTE: The type of fitting rung corresponds to the type of cable ladder in the same order Cable Ladder DK -rung cross-section Cable Ladder DU - rung cross-section

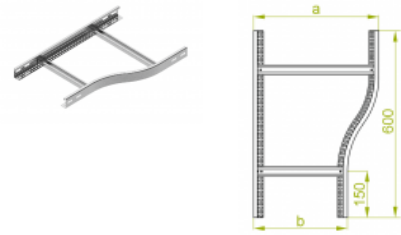

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.	Size b [mm]
RDPC200/100H50N	200	458820	2	1,96	100
RDPC300/200H50N	300	458830	2	2,17	200
RDPC400/300H50N	400	458340	2	2,41	300
RDPC500/400H50N	500	458350	2	2,65	400
RDPC600/500H50N	600	458360	2	2,87	500