


DUD...H60N Cable Ladder

Overview:

Application
Cable routing

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel sections to 3m long (SS)
L- powder coating in a full range of colours (PC)

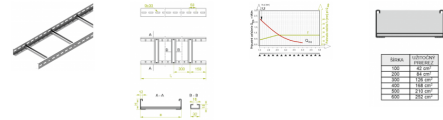

NOTE: Cable ladder with rungs adapted for use with Cable Clamps UK

Available upon special order:

- cable ladders 2m long
- cable ladders 150, 250mm wide
- production capability of perforated rungs

Versions:

Sheet thickness: 1,2 mm

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
DUD100H60/3N	3000	100	466010	4	2,01	4200
DUD100H60/6N	6000	100	466110	2	2,01	4200
DUD200H60/3N	3000	200	466020	4	2,24	8400
DUD200H60/6N	6000	200	466120	2	2,24	8400
DUD300H60/3N	3000	300	466030	2	2,47	12600
DUD300H60/6N	6000	300	466130	2	2,47	12600
DUD400H60/3N	3000	400	466040	2	2,81	16800
DUD400H60/6N	6000	400	466140	2	2,81	16800
DUD500H60/3N	3000	500	466050	2	2,92	21000
DUD500H60/6N	6000	500	466150	2	2,92	21000
DUD600H60/3N	3000	600	466060	2	3,15	25200
DUD600H60/6N	6000	600	466160	2	3,15	25200

Connected products:

