


DUP/DUOP...H60 Cable Ladder

Overview:

Application
Cable routing

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel sections to 3m long (SS)
L- powder coating in a full range of colours (PC)

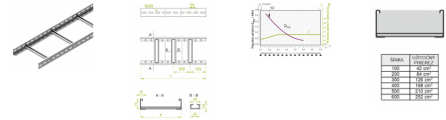

NOTE: Cable ladder with rungs adapted for use with Cable Clamps UK

Available upon special order:

- cable ladders 2m long
- cable ladders 150, 250mm wide
- production capability of perforated rungs

Versions:

Sheet thickness: 1,5 mm

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
DUP/DUOP100H 60/3	3000	100	466310	4	2,42	4200
DUP/DUOP100H 60/6	6000	100	466410	2	2,42	4200
DUP/DUOP200H 60/3	3000	200	466320	4	2,69	8400
DUP/DUOP200H 60/6	6000	200	466420	2	2,69	8400
DUP/DUOP300H 60/3	3000	300	466330	2	2,97	12600
DUP/DUOP300H 60/6	6000	300	466430	2	2,97	12600
DUP/DUOP400H 60/3	3000	400	466340	2	3,38	16800
DUP/DUOP400H 60/6	6000	400	466440	2	3,38	16800
DUP500H60/3	3000	500	466350	2	3,51	21000
DUP500H60/6	6000	500	466450	2	3,51	21000
DUP600H60/3	3000	600	466360	2	3,79	25200
DUP600H60/6	6000	600	466460	2	3,79	25200

Connected products:

