


## DUC...H60N Cable Ladder

### Overview:

**Application**  
Cable routing

**Material**  
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**  
**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)  
**E-** stainless steel sections to 3m long (SS)  
**L-** powder coating in a full range of colours (PC)

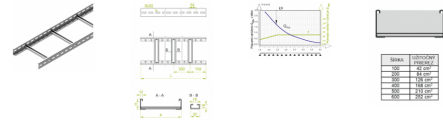

**NOTE: Cable ladder with rungs adapted for use with Cable Clamps UK**

**Available upon special order:**

- cable ladders 2m long
- cable ladders 150, 250mm wide
- production capability of perforated rungs

### Versions:

Sheet thickness: **2,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
DUC100H60/3N	3000	100	466610	4	3,22	4200
DUC100H60/6N	6000	100	466710	2	3,22	4200
DUC200H60/3N	3000	200	466620	4	3,58	8400
DUC200H60/6N	6000	200	466720	2	3,58	8400
DUC300H60/3N	3000	300	466630	2	3,96	12600
DUC300H60/6N	6000	300	466730	2	3,96	12600
DUC400H60/3N	3000	400	466640	2	4,50	16800
DUC400H60/6N	6000	400	466740	2	4,50	16800
DUC500H60/3N	3000	500	466650	2	4,67	21000
DUC500H60/6N	6000	500	466750	2	4,67	21000
DUC600H60/3N	3000	600	466660	2	5,05	25200
DUC600H60/6N	6000	600	466760	2	5,05	25200

### Connected products:

