

LDZC...H60N 90° Horizontal Bend - External

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)


Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

NOTE: The type of fitting rung corresponds to the type of cable ladder in the same order Cable Ladder DK - rung cross-section Cable Ladder DU - rung cross-section

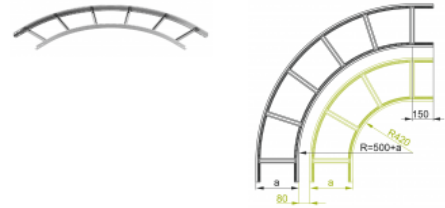

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LDZC100H60N	100	467110	2	4,28
LDZC200H60N	200	467120	2	6,06
LDZC300H60N	300	467130	2	7,89
LDZC400H60N	400	467140	2	8,55
LDZC500H60N	500	467150	2	9,89
LDZC600H60N	600	467160	2	11,50