

## LPDP...H60N Adjustable Vertical Bend

### Overview:

**Application**

Diversion in cable routing

**Material**


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

**L-** powder coating in a full range of colours (PC)

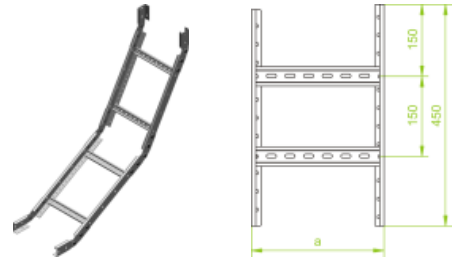

### Versions:

Sheet thickness: **1,5 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LPDP100H60N	100	467610	2	4,60
LPDP200H60N	200	467620	2	4,97
LPDP300H60N	300	467630	2	5,36
LPDP400H60N	400	467640	2	5,93
LPDP500H60N	500	467650	2	6,11
LPDP600H60N	600	467660	2	6,51