

LPDC...H60N Adjustable Vertical Bend

Overview:

Application

Diversion in cable routing

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

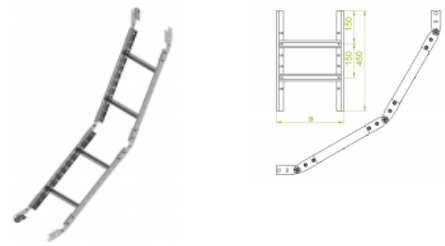

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LPDC100H60N	100	467710	2	5,70
LPDC200H60N	200	467720	2	6,20
LPDC300H60N	300	467730	2	6,74
LPDC400H60N	400	467740	2	7,50
LPDC500H60N	500	467750	2	7,75
LPDC600H60N	600	467760	2	8,27