

## LPDWC...H60N 90° Vertical Bend - Internal

### Overview:

**Application**

Diversion in cable routing

**Material**


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

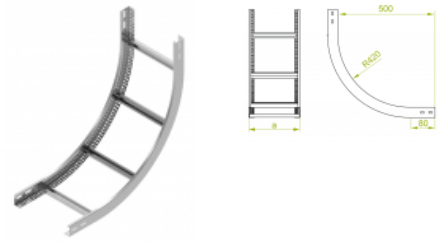

**NOTE: The type of fitting rung corresponds to the type of cable ladder in the same order Cable Ladder DK - rung cross-section Cable Ladder DU - rung cross-section**

**FEATURES & BENEFITS**

- capability of manufacturing vertical bends of any internal radius adjusted to minimum bending angle
- high mechanical properties
- even distribution of cables
- alternative use of covers
- eye-pleasing appearance

### Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LPDWC100H60N	100	469310	1	2,40
LPDWC200H60N	200	469320	1	2,76
LPDWC300H60N	300	469330	1	3,16
LPDWC400H60N	400	469340	1	3,52
LPDWC500H60N	500	469350	1	3,92
LPDWC600H60N	600	469360	1	4,32