

## LPDZP/LPDZOP...H60 90° Vertical Bend - External

### Overview:

**Application**

Diversion in cable routing

**Material**


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

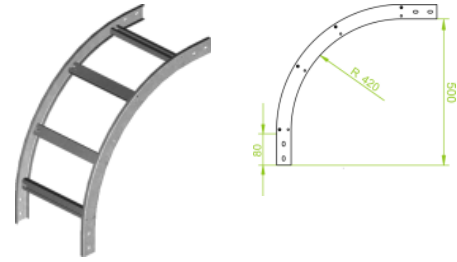

**NOTE: The type of fitting rung corresponds to the type of cable ladder in the same order Cable Ladder DK - rung cross-section Cable Ladder DU - rung cross-section**

**FEATURES & BENEFITS**

- capability of manufacturing vertical bends of any internal radius adjusted to minimum bending angle
- high mechanical properties
- even distribution of cables
- alternative use of covers
- eye-pleasing appearance

### Versions:

Sheet thickness: 1,5 mm

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LPDZP/LPDZOP100H60	100	469010	1	1,90
LPDZP/LPDZOP200H60	200	469020	1	2,26
LPDZP/LPDZOP300H60	300	469030	1	2,66
LPDZP/LPDZOP400H60	400	469040	1	3,02
LPDZP/LPDZOP500H60	500	469050	1	3,42
LPDZP/LPDZOP600H60	600	469060	1	3,82