

LDZC...H80N 90° Horizontal Bend - External

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)


Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

NOTE: The type of fitting rung corresponds to the type of cable ladder in the same order Cable Ladder DK - rung cross-section Cable Ladder DU - rung cross-section

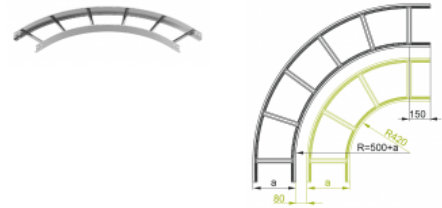

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LDZC100H80N	100	496510	2	5,04
LDZC200H80N	200	496520	2	6,60
LDZC300H80N	300	496530	2	8,21
LDZC400H80N	400	496540	2	9,77
LDZC500H80N	500	496550	2	11,26
LDZC600H80N	600	496560	2	13,02