

RDSC...H100N Straight Reducer

Overview:

Application

Reducing/extending widths of cable runs

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)


Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

In case of special orders specify dimensions a, b
NOTE: The type of fitting rung corresponds to the type of cable ladder in the same order Cable Ladder DK -rung cross-section Cable Ladder DU - rung cross-section

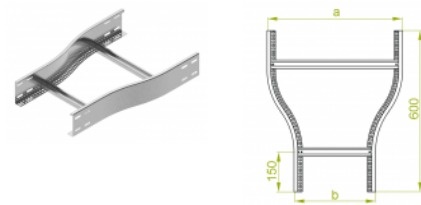

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.	Size b [mm]
RDSC200/100H100 N	200	492820	2	2,81	100
RDSC300/200H100 N	300	492830	2	3,04	200
RDSC400/300H100 N	400	492840	2	3,28	300
RDSC500/400H100 N	500	492850	2	3,52	400
RDSC600/500H100 N	600	492860	2	3,73	500