
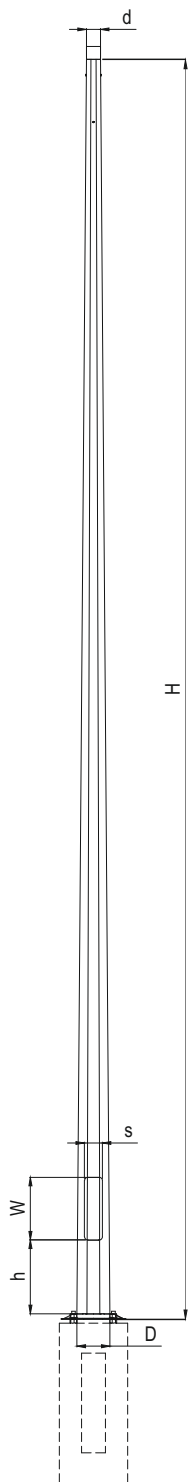


## Parkový osemhranný osvetľovací stĺp s prírubou

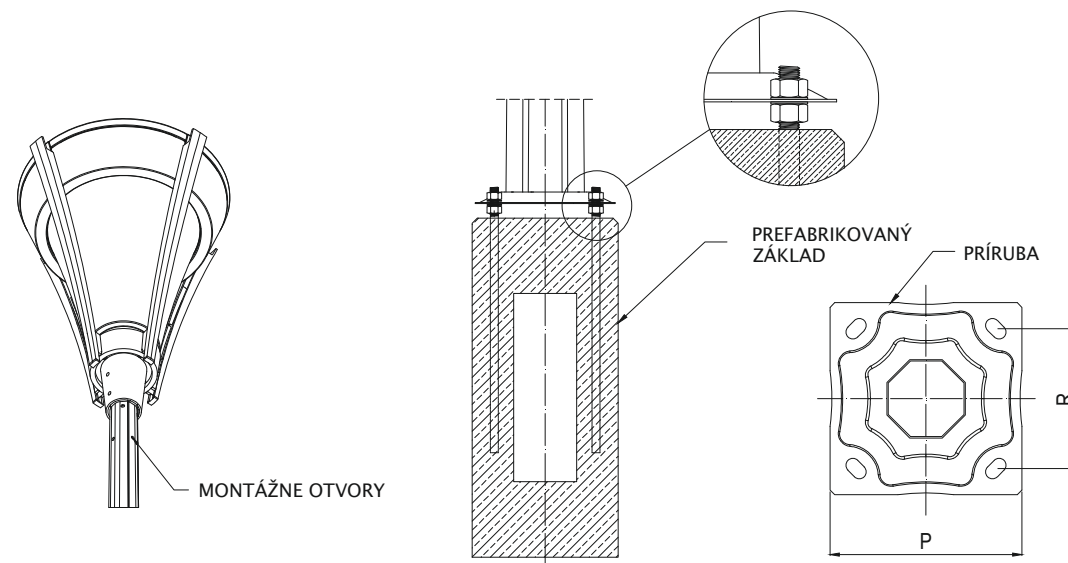

Tabuľka s geometriou stĺpa

Tabuľka s pevnostnými parametrami

SYMBOL										Kg				M	T	
	H	d	D	$h_w$	s	h	P / R				I pásmo	II pásmo	III pásmo			[daNm]
	[m]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[cm]	[mm]	[kg]	[m <sup>2</sup> ]	[m <sup>2</sup> ]	[m <sup>2</sup> ]		
S-30/8 SAT	3										40	2,35	1,98	1,46	677	255
S-35/8 SAT	3,5									1,96		1,65	1,20	695	234	
S-40/8 SAT	4	60	140	400	95	500	271 / 200	M18	100 / 30	800		1,48	1,24	0,88	651	204
S-45/8 SAT	4,5											1,21	0,99	0,70	665	195
S-50/8 SAT	5											1,10	0,90	0,62	733	200
S-60P/8 SAT	6									1000		0,74	0,58	0,38	760	194