

## RKLBJ...H80 Left Reducer

### Overview:

**Application**

Reducing/extending widths of cable runs

**Material**


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

**L-** powder coating in a full range of colours (PC)

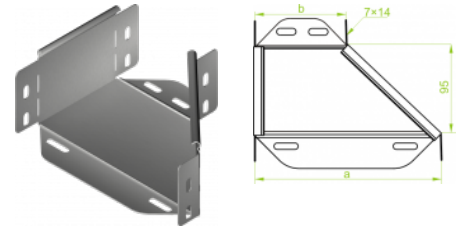


**For installation use Screw Sets SGK M6×12 or SG M6×12.  
In case of special orders please specify dimensions a and b.**

### Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.	Size b [mm]
<b>RKLBJ150/100H80</b>	<b>150</b>	<b>188915</b>	<b>10</b>	<b>0,25</b>	<b>100</b>
<b>RKLBJ200/100H80</b>	<b>200</b>	<b>188920</b>	<b>10</b>	<b>0,29</b>	<b>100</b>
<b>RKLBJ200/150H80</b>	<b>200</b>	<b>189020</b>	<b>10</b>	<b>0,31</b>	<b>150</b>
<b>RKLBJ300/200H80</b>	<b>300</b>	<b>188930</b>	<b>10</b>	<b>0,38</b>	<b>200</b>
<b>RKLBJ400/300H80</b>	<b>400</b>	<b>188940</b>	<b>6</b>	<b>0,44</b>	<b>300</b>
<b>RKLBJ500/400H80</b>	<b>500</b>	<b>188950</b>	<b>6</b>	<b>0,52</b>	<b>400</b>
<b>RKLBJ600/500H80</b>	<b>600</b>	<b>188960</b>	<b>6</b>	<b>0,60</b>	<b>500</b>

### Connected products:

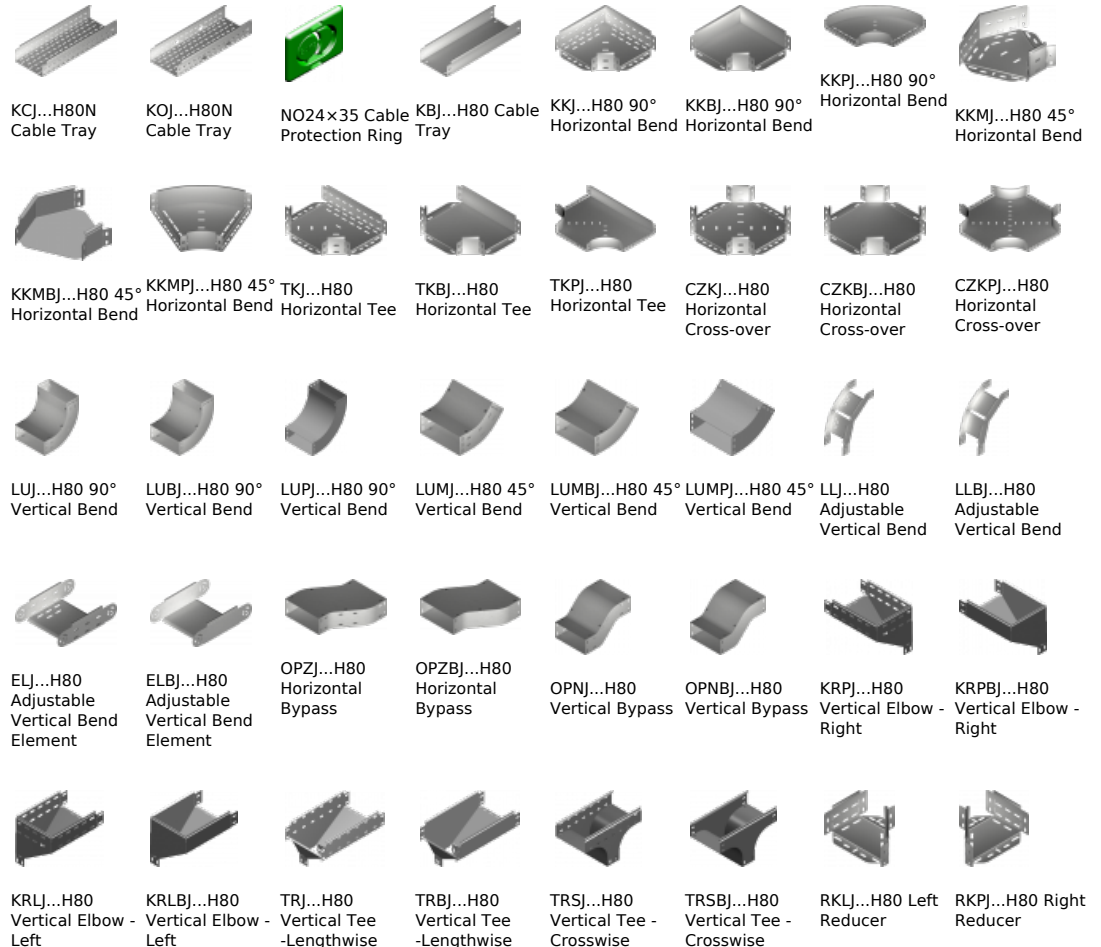

RKPBJ...H80  
Right ReducerRKSJ...H80  
Straight  
ReducerRKSBJ...H80  
Straight  
ReducerLRJH80 Corner  
ConnectorLRBJH80 Corner  
ConnectorTKDJ...H80  
Add-on TeeLRPJH80 Corner  
Connector