

LDZC...H100N 90° Horizontal Bend - External

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)


Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

NOTE: The type of fitting rung corresponds to the type of cable ladder in the same order Cable Ladder DK - rung cross-section Cable Ladder DU - rung cross-section

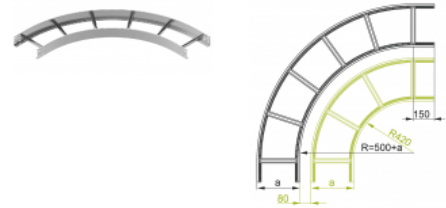

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LDZC100H100N	100	499810	2	5,81
LDZC200H100N	200	499820	2	7,50
LDZC300H100N	300	499830	2	9,28
LDZC400H100N	400	499840	2	10,97
LDZC500H100N	500	499850	2	12,62
LDZC600H100N	600	499860	2	14,54