

TRSJ...H110 Vertical Tee - Crosswise

Overview:

Application

Branching out cable routes. Transition of tray cable run from the horizontal to the vertical plane.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

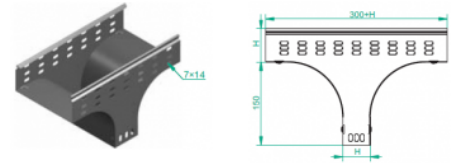

For installation use Screw Sets SGK M6×12 or SG M6×12 and Straight Connectors LPL or LPP.

Quick and convenient installation by the use of dismantled parts

This innovative solution allows for fast and safe cable laying without the need of pulling

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
TRSJ100H110	100	124710	4	1,76
TRSJ150H110	150	124715	4	1,95
TRSJ200H110	200	124720	4	2,13
TRSJ300H110	300	124730	1	2,50
TRSJ400H110	400	124740	1	2,87
TRSJ500H110	500	124750	1	3,24
TRSJ600H110	600	124760	1	3,60