

TRSBP...H110 Vertical Tee - Crosswise

Overview:

Application

Branching out cable routes. Transition of tray cable run from the horizontal to the vertical plane.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

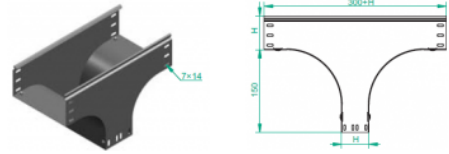

For installation use Screw Sets SGK M6×12 or SG M6×12 and Straight Connectors LPL or LPP.

Quick and convenient installation by the use of dismantled parts

This innovative solution allows for fast and safe cable laying without the need of pulling

Versions:

Sheet thickness: **1,5 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
TRSBP100H110	100	128810	4	2,65
TRSBP150H110	150	128815	4	2,92
TRSBP200H110	200	128820	4	3,20
TRSBP300H110	300	128830	1	3,75
TRSBP400H110	400	128840	1	4,30
TRSBP500H110	500	128850	1	4,86
TRSBP600H110	600	128860	1	5,42