

LWKSC...H120 90° Vertical Bend - Internal

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)


L- powder coating in a full range of colours (PC)

For joining fittings to cable tray use Straight Connectors for Fittings

LSSU... and Screw Sets SGKM8×16. Capability of creating vertical bends of any internal radius adjusted to minimum cable bending angle.

FEATURES & BENEFITS:

- eye-pleasing appearance
- high mechanical properties
- even distribution of cables
- optional use of covers

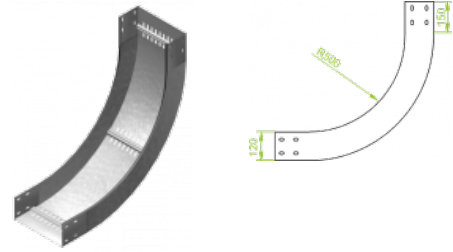

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LWKSC200H120	200	241122	2	8,18
LWKSC300H120	300	241132	2	9,41
LWKSC400H120	400	241142	2	10,40
LWKSC500H120	500	241152	2	11,93
LWKSC600H120	600	241162	2	13,32