

LWKSC...H150 90° Vertical Bend - Internal

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)


L- powder coating in a full range of colours (PC)

For joining fittings to cable tray use Straight Connectors for Fittings

LSSU... and Screw Sets SGKM8×16. Capability of creating vertical bends of any internal radius adjusted to minimum cable bending angle.

FEATURES & BENEFITS:

- eye-pleasing appearance
- high mechanical properties
- even distribution of cables
- optional use of covers

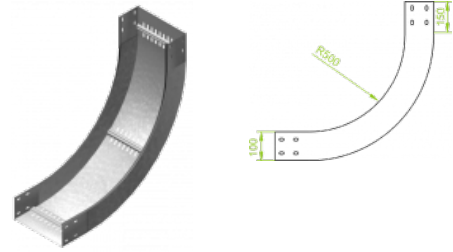

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LWKSC200H150	200	271122	2	9,50
LWKSC300H150	300	271132	2	10,73
LWKSC400H150	400	271142	2	11,72
LWKSC500H150	500	271152	2	13,25
LWKSC600H150	600	271162	2	14,64