

LWDSM...H200 90° Vertical Bend - Internal

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)


L- powder coating in a full range of colours (PC)

For joining fittings to cable tray use Straight Connectors for Fittings

LSSU... and Screw Sets SGKM8×16. Capability of creating vertical bends of any internal radius adjusted to minimum cable bending angle.

FEATURES & BENEFITS:

- eye-pleasing appearance
- high mechanical properties
- even distribution of cables
- optional use of covers

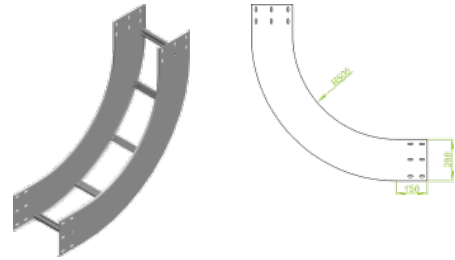

Versions:

Sheet thickness: 2,5 mm

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LWDSM200H200	200	434423	1	14,75
LWDSM300H200	300	434433	1	15,26
LWDSM400H200	400	434443	1	15,58
LWDSM500H200	500	434453	1	15,96
LWDSM600H200	600	434463	1	16,35