

LZDSC...H120 90° Vertical Bend - External

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)


L- powder coating in a full range of colours (PC)

For joining fittings to cable tray use Straight Connectors for Fittings

LSSU... and Screw Sets SGKM8×16. Capability of creating vertical bends of any internal radius adjusted to minimum cable bending angle.

FEATURES & BENEFITS:

- eye-pleasing appearance
- high mechanical properties
- even distribution of cables
- optional use of covers

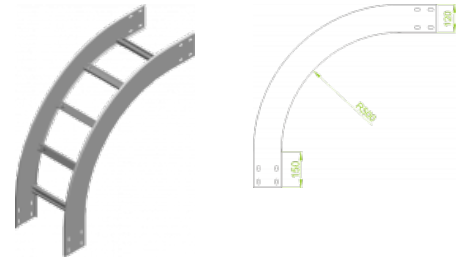

Versions:

Sheet thickness: 2,0 mm

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LZDSC200H120	200	431322	1	6,31
LZDSC300H120	300	431332	1	6,72
LZDSC400H120	400	431342	1	7,14
LZDSC500H120	500	431352	1	7,56
LZDSC600H120	600	431362	1	7,97