

LZDSM...H200 90° Vertical Bend - External

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)


L- powder coating in a full range of colours (PC)

For joining fittings to cable tray use Straight Connectors for Fittings

LSSU... and Screw Sets SGKM8×16. Capability of creating vertical bends of any internal radius adjusted to minimum cable bending angle.

FEATURES & BENEFITS:

- eye-pleasing appearance
- high mechanical properties
- even distribution of cables
- optional use of covers

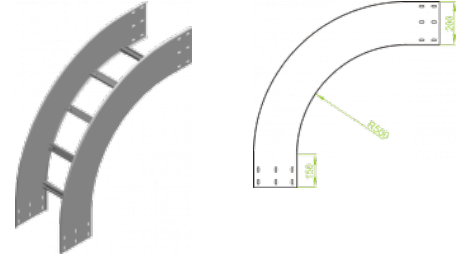

Versions:

Sheet thickness: 2,5 mm

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LZDSM200H200	200	434523	1	14,75
LZDSM300H200	300	434533	1	15,26
LZDSM400H200	400	434543	1	15,58
LZDSM500H200	500	434553	1	15,96
LZDSM600H200	600	434563	1	16,35