

## OPNKMC...H200 Vertical Bypass

### Overview:

#### APPLICATIONS

Bypassing mechanical obstacles in cable routing

#### MATERIAL


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG).

Available finishes:

F- steel, hot-dip galv. to

PN-EN ISO 1461:2011 (HDG)

E - stainless steel (SS), grade 1.4301 (AISI304)

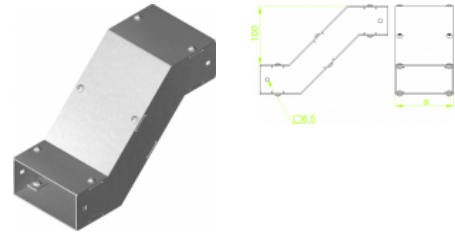

**For installation use Screw Sets SGKM6×14 and Straight Connectors LKM...**

### Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]
<b>OPNKMC200H200</b>	<b>200</b>	<b>817820</b>	<b>2</b>	<b>0,00</b>
<b>OPNKMC300H200</b>	<b>300</b>	<b>817830</b>	<b>2</b>	<b>0,00</b>
<b>OPNKMC400H200</b>	<b>400</b>	<b>817840</b>	<b>2</b>	<b>0,00</b>
<b>OPNKMC500H200</b>	<b>500</b>	<b>817850</b>	<b>2</b>	<b>0,00</b>
<b>OPNKMC600H200</b>	<b>600</b>	<b>817860</b>	<b>2</b>	<b>0,00</b>