

OPNB...H30 Vertical Bypass

Overview:

Application

Bypassing mechanical obstacles in cable routing

Material



Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)




For installation use Screw Sets SGK M6×10 or SG M6×10 and Straight Connectors LPL or LPP. Quick and convenient installation by the use of dismantled parts. This innovative solution allows for fast and safe cable laying without the need of pulling

Versions:

Sheet thickness: **1,0 mm**

| Symbol | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|-------------|--------------|------------------|-----------------|--------------|
| OPNBJ50H30 | 50 | 136505 | 2 | 0,41 |
| OPNBJ100H30 | 100 | 136510 | 2 | 0,70 |
| OPNBJ150H30 | 150 | 136515 | 2 | 0,96 |
| OPNBJ200H30 | 200 | 136520 | 2 | 1,22 |
| OPNBJ300H30 | 300 | 136530 | 2 | 1,76 |

Connected products:

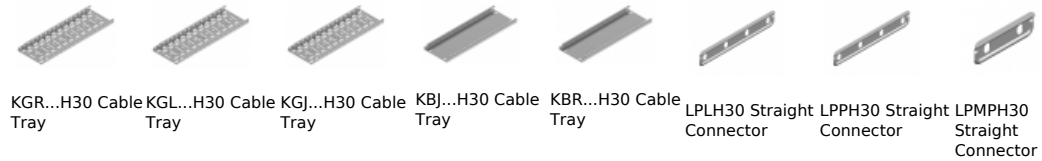

KGR...H30 Cable Tray KGL...H30 Cable Tray KGJ...H30 Cable Tray KBJ...H30 Cable Tray KBR...H30 Cable Tray LPLH30 Straight Connector LPPH30 Straight Connector LPMH30 Straight Connector



LPMLH30 Straight Connector SGK... Screw Set SM... Screw Set