

LPDWC...H50N 90° Vertical Bend - Internal

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)


E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

NOTE: The type of fitting rung corresponds to the type of cable ladder in the same order Cable Ladder DK - rung cross-section Cable Ladder DU - rung cross-section

FEATURES & BENEFITS

- capability of manufacturing vertical bends of any internal radius adjusted to minimum bending angle
- high mechanical properties
- even distribution of cables
- alternative use of covers
- eye-pleasing appearance

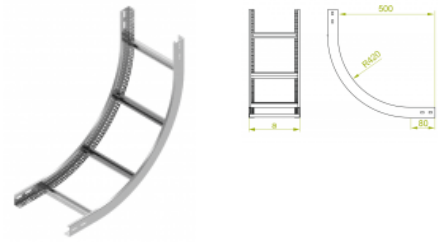

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LPDWC100H50	100	459310	1	2,10
LPDWC200H50	200	459320	1	2,46
LPDWC300H50	300	459330	1	2,86
LPDWC400H50	400	459340	1	3,22
LPDWC500H50	500	459350	1	3,62
LPDWC600H50	600	459360	1	4,02