

LPDWP/LPDWOP...H60 90° Vertical Bend - Internal

Overview:

Application

Diversion in cable routing

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

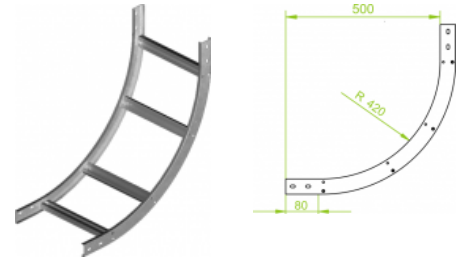

NOTE: The type of fitting rung corresponds to the type of cable ladder in the same order Cable Ladder DK - rung cross-section Cable Ladder DU - rung cross-section

FEATURES & BENEFITS

- capability of manufacturing vertical bends of any internal radius adjusted to minimum bending angle
- high mechanical properties
- even distribution of cables
- alternative use of covers
- eye-pleasing appearance

Versions:

Sheet thickness: 1,5 mm

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LPDWP/LPDWOP100H60	100	469210	1	1,90
LPDWP/LPDWOP200H60	200	469220	1	2,26
LPDWP/LPDWOP300H60	300	469230	1	2,66
LPDWP/LPDWOP400H60	400	469240	1	3,02
LPDWP/LPDWOP500H60	500	469250	1	3,42
LPDWP/LPDWOP600H60	600	469260	1	3,82