

LPDWC...H80N 90° Vertical Bend - Internal

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)


E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

NOTE: The type of fitting rung corresponds to the type of cable ladder in the same order Cable Ladder DK - rung cross-section Cable Ladder DU - rung cross-section

FEATURES & BENEFITS

- capability of manufacturing vertical bends of any internal radius adjusted to minimum bending angle
- high mechanical properties
- even distribution of cables
- alternative use of covers
- eye-pleasing appearance

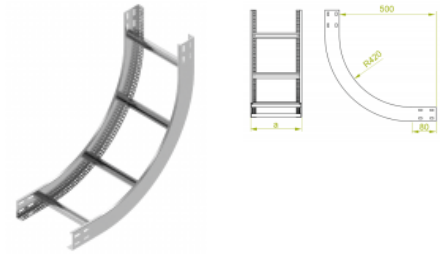

Sheet thickness: **2,0 mm**

Versions:

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LPDWC100H80N	100	489310	1	3,10
LPDWC200H80N	200	489320	1	3,46
LPDWC300H80N	300	489330	1	3,86
LPDWC400H80N	400	489340	1	4,22
LPDWC500H80N	500	489350	1	4,62
LPDWC600H80N	600	489360	1	5,02